

## AZOTO


### KIT DI PRESSURIZZAZIONE CON AZOTO

Il riduttore professionale per eccellenza **AZ200/50 con duplice connessione integrata** per cartucce e bombole (non richiede alcun adattatore esterno) e valvola di sicurezza "High Performance" permette di pressurizzare l'impianto al valore necessario per eseguire il controllo.

Il kit di pressurizzazione K-AZ200-50/BN2-A/C contiene all'interno di una robusta valigetta in plastica:

- Riduttore di pressione AZ200/50 con duplice connessione. Pressione max uscita 48bar.
- Manometro di controllo Ø80, classe 1 con indice di posizionamento e vite di regolazione.
- Tubo flessibile 1/4" SAE, 900 mm + 200 mm.
- Cartuccia azoto BN2/1-TPED - 1lt - 110bar
- Attacchi rapidi di bassa pressione per R134a e R1234yf.

| Codice             | Modello               | Descrizione                                               |
|--------------------|-----------------------|-----------------------------------------------------------|
| <b>13005017004</b> | K-AZ200-50/BN2-W-AV   | Attacchi paese IT W21.7 x 1/14" M UN11144-5 M10x1         |
| <b>13005017010</b> | K-AZ200-50/BN2-W-AV-D | Attacchi paese F-B-P-E Ø21.7 x 1.814F NF E 29-650/C M10x1 |
| <b>13005017013</b> | K-AZ200-50/BN2-W-AV-C | Attacchi paese D W24.32 x 1/14" F DIN477 nr10 M10x1       |
| <b>13005017012</b> | K-AZ200-50/BN2-W-AV-E | Attacchi paese GB G5/8" M BS341 nr3                       |

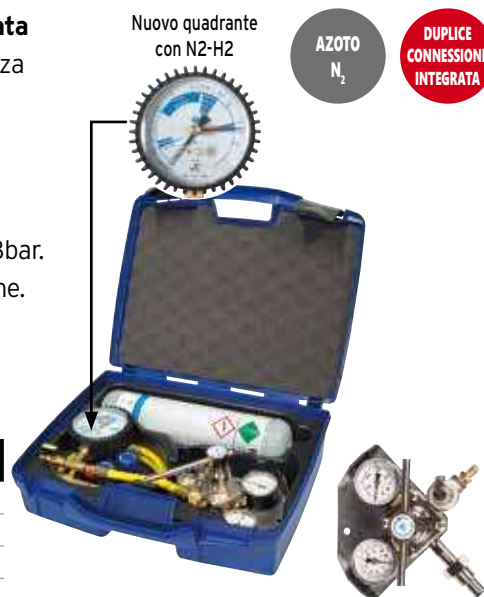

### KIT BASE DI PRESSURIZZAZIONE UNIVERSALE

Il kit, grazie alla sua elevata pressione massima di esercizio (60 bar), può essere utilizzato per pressurizzare impianti A/C sia con azoto sia con AZOIDRO, unicamente in formato di bombole.

Il kit di pressurizzazione K-WN2-60-A/C contiene all'interno di una robusta valigetta in plastica:

- Riduttore di pressione WN2-60 con singola connessione per bombole. Pressione max uscita 60bar.
- Manometro di controllo Ø80, classe 1 con indice di posizionamento e vite di regolazione.
- Tubo flessibile 1/4" SAE, 1800 mm + 200 mm.
- Attacchi rapidi di bassa pressione per R134a e R1234yf.

| Codice             | Modello        | Descrizione                                               |
|--------------------|----------------|-----------------------------------------------------------|
| <b>13005066010</b> | K-WN2-60-A/C   | Attacchi paese it W21.7 x 1/14" M UN11144-5 M10x1         |
| <b>13005066011</b> | K-WN2-60-A/C-D | Attacchi paese F-B-P-E Ø21.7 x 1.814F NF E 29-650/C M10x1 |
| <b>13005066012</b> | K-WN2-60-A/C-C | Attacchi paese D W24.32 x 1/14" F DIN477 nr10 M10x1       |
| <b>13005066013</b> | K-WN2-60-A/C-E | Attacchi paese GB G5/8" M BS341 nr3                       |



### BOMBOLE AZOTO E GAS CONTROL

Cartuccia 1 litro e bombola 5 litri di azoto compresso ad alta pressione. GAS CONTROL cercafughe spray.

| Codice            | Modello     | Descrizione                 |
|-------------------|-------------|-----------------------------|
| <b>A 11001060</b> | BN2/1-TPED  | Bomboletta 950 cc - 110 bar |
| <b>B 11003011</b> | BAZ50/1     | Bombola piena 5 l - 200 bar |
| <b>C 09001080</b> | GAS CONTROL | Cercafughe spray 400 ml     |





## NITROGEN

### LEAK DETECTION KIT WITH NITROGEN

The heavy duty professional nitrogen regulator **AZ200/50 with dual integrated** connection for cartridges and cylinders (no external adapter required) and "High Performance" safety valve allows to pressurize the system to the value necessary to perform the check.

The K-AZ200-50/BN2-A/C kit contains in a sturdy plastic case:

- AZ200/50 pressure regulator with dual connection (Max. output pressure 48 bar).
- Control pressure gauge Ø80, class 1 with positioning index and adjustment screw.
- 1/4 "SAE flexible hose, 900 mm + 200 mm.
- Nitrogen cartridge 1 lt - 110 bar.
- Low pressure quick couplers for R134a and R1234yf.

| Code               | Model                 | Description                                                   |
|--------------------|-----------------------|---------------------------------------------------------------|
| <b>13005017004</b> | K-AZ200-50/BN2-W-AV   | Country connection it W21.7 x 1/14" M UN11144-5 M10x1         |
| <b>13005017010</b> | K-AZ200-50/BN2-W-AV-D | Country connection F-B-P-E Ø21.7 x 1.814F NF E 29-650/C M10x1 |
| <b>13005017013</b> | K-AZ200-50/BN2-W-AV-C | Country connection D W24.32 x 1/14" F DIN477 nr10 M10x1       |
| <b>13005017012</b> | K-AZ200-50/BN2-W-AV-E | Country connection GB G5/8" M BS341 nr3                       |



### UNIVERSAL LEAK DETECTION KIT

Thanks to its high maximum operating pressure (60 bar), the kit can be used to pressurize A/C systems with both nitrogen and AZOIDRO, only with cylinders.

The pressurization kit K-WN2-60-A/C contains in a sturdy plastic case:

- WN2-60 nitrogen regulator with single connection for cylinder (Max. output pressure 60bar).
- Control pressure gauge Ø80, class 1 with positioning index and adjustment screw.
- 1/4 "SAE flexible hose, 1800 mm + 200 mm.
- Low pressure quick couplers for R134a and R1234yf.

| Code               | Model          | Description                                                   |
|--------------------|----------------|---------------------------------------------------------------|
| <b>13005066010</b> | K-WN2-60-A/C   | Country connection it W21.7 x 1/14" M UN11144-5 M10x1         |
| <b>13005066011</b> | K-WN2-60-A/C-D | Country connection F-B-P-E Ø21.7 x 1.814F NF E 29-650/C M10x1 |
| <b>13005066012</b> | K-WN2-60-A/C-C | Country connection D W24.32 x 1/14" F DIN477 nr10 M10x1       |
| <b>13005066013</b> | K-WN2-60-A/C-E | Country connection GB G5/8" M BS341 nr3                       |



### NITROGEN CYLINDERS AND GAS CONTROL

1 liter cartridge and 5 liters high pressure compressed nitrogen cylinder.  
GAS CONTROL spray leak detector.

|          | Code            | Model       | Description                |
|----------|-----------------|-------------|----------------------------|
| <b>A</b> | <b>11001060</b> | BN2/1-TPED  | Cartridge 950 cc - 110 bar |
| <b>B</b> | <b>11003011</b> | BAZ50/1     | Bottle 5 l - 200 bar       |
| <b>C</b> | <b>09001080</b> | GAS CONTROL | Spray leak detector 400 ml |

