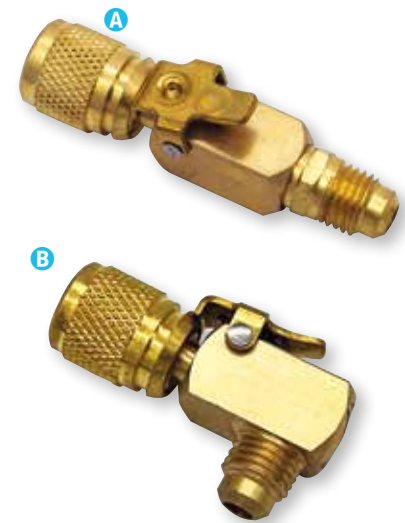


ATTACCHI RAPIDI

- Permettono di aprire o chiudere automaticamente il sistema senza perdita di refrigerante.
- Eliminano fuoriuscite pericolose di refrigerante e olio dal sistema al momento dello scollegamento del tubo.
- Evitano il rischio di bruciature alle dita al momento dello scollegamento.

Rif	Codice	Modello	Descrizione
A	05059005	16 C	Attacco rapido diritto 1/4" SAE maschio x 1/4" SAE femmina
A	05059038	26 C	Attacco rapido diritto 5/16" SAE maschio x 5/16" SAE femmina
B	05059007	17 C	Attacco rapido 90° 1/4" SAE maschio x 1/4" SAE femmina
B	05059039	27 C	Attacco rapido 90° 5/16" SAE maschio x 5/16" SAE femmina

Rif	Codice	Dimensioni	Peso
A	05059005	165 x 135 x 20 mm	0,07 kg
A	05059038	165 x 135 x 20 mm	0,07 kg
B	05059007	165 x 135 x 20 mm	0,07 kg
A	05059039	165 x 135 x 20 mm	0,07 kg


Ricambi

Codice	Modello	Descrizione	Per	
14020087	S8920071	Inserto femmina	16C	10
14020088	S8920072	Fermo innesto femmina	16C	10
14020047	S8920073	Kit guarnizioni	16C-17C	10
14020022	S8920077	Kit o-ring	16C-17C-26C-27C	10
14020023	S8920263	Kit o-ring 3/16"	19C	10
14020081	S10000996	Kit guarnizioni	26C-27C	10

CLICK-LOCK
Sistema universale d'identificazione e protezione

Proteggono il tuo lavoro.

Riducono gli interventi in garanzia indesiderati.

Difendono la tua reputazione e danno al tuo cliente una protezione permanente.

Salvaguardano le tue attrezzature dalla contaminazione da refrigeranti inquinati.

Codice	Modello	Descrizione	Confezione	Dimensioni	Peso
05049025	CLSR100	Per attacchi 1/4"-3/8"-1/2"..	25 pz	240 x 200 x 60 mm	0,30 kg
05049034	CLSC100	Per attacchi 5/16"	25 pz	240 x 200 x 60 mm	0,30 kg

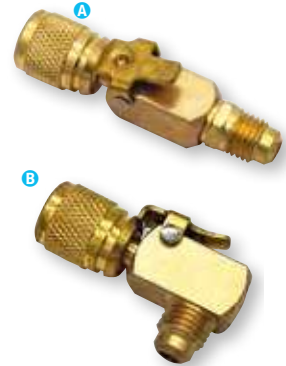

Montare CLICK-LOCK? Niente di più facile!


QUICK COUPLERS

- Allow to open or close automatically the system without loss of refrigerant.
- Eliminate hazardous discharge of refrigerant and oil from system when disconnecting hose.
- Prevent finger burn when disconnecting.

Ref	Code	Model	Description
A	05059005	16 C	1/4" SAE male x 1/4" SAE female
A	05059038	26 C	5/16" SAE male x 5/16" SAE female
B	05059007	17 C	1/4" SAE male 1/4" SAE female
B	05059039	27 C	5/16" SAE male 5/16" SAE female

Ref	Code	Dimensions	Weight
A	05059005	165 x 135 x 20 mm	0,07 kg
A	05059038	165 x 135 x 20 mm	0,07 kg
B	05059007	165 x 135 x 20 mm	0,07 kg
A	05059039	165 x 135 x 20 mm	0,07 kg



Spare parts

Code	Model	Description	For	
14020087	S8920071	Female coupler-sleeve	16C	
14020088	S8920072	Female coupler-retaine	16C	
14020047	S8920073	Female coupler-gasket kit	16C-17C	
14020022	S8920077	Female coupler-o-ring	16C-17C-26C-27C	
14020023	S8920263	Female coupler-3/16"	19C	
14020081	S10000996	Female coupler-gasket kit	26C-27C	

CLICK-LOCK

Universal system of identification and protection

Protect your craftsmanship.

Reduce questionable warranty returns.

Defend your reputation and provide your customer with a permanent system protection. Safeguard your equipment from being contaminated by impure refrigerants.

Code	Model	Description	Pack	Dimensions	Weight
05049025	CLSR100	For 1/4"-3/8"-1/2"..	25 pcs	240 x 200 x 60 mm	0,30 kg
05049034	CLSC100	For 5/16"	25 pcs	240 x 200 x 60 mm	0,30 kg



How to fit the CLICK-LOCK? As easy as 1-2-3!

