

## SILENT

### Pompa scarico condensa senza sistema di neutralizzazione

Utilizzabile per impianti di condizionamento e di deumidificazione dell'aria.

Utilizzabile con caldaie a gas fino a 400 kW.

Realizzata in materiale plastico ABS, è resistente all'acqua di condensa acida (PH3).


Estremamente silenziosa.

Codice	Modello	Dimensioni	Peso
02042002	SILENT	185 x 85 x 100 mm	1,6 kg



## Caratteristiche tecniche

Per caldaie a gas fino a	400 kW
Portata massima	350 l/h
Prevalenza massima	4 m
Capacità serbatoio	0,5 l
Temperatura fluido	70°C
Tensione	230V - 50/60Hz
Contatti allarme	Máx 24V. 6VA(NA) Ohm load

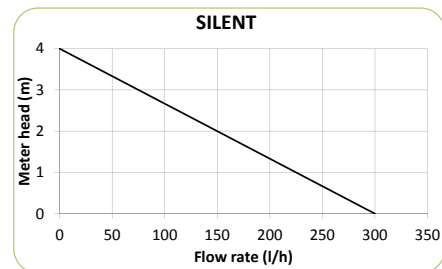

## CLIMA-CAP

### Teli protettivi per unità esterne

Dimensioni ottimizzate per le principali unità R32.

Codice	Modello	Misure	Adatto per
16010010	CLIMA-CAP-M/D	550 x 860 x 340 mm	Mono 20-35 / Multi 2-R32
16010011	CLIMA-CAP-MUL	735 x 980 x 400 mm	Mono 42-60 / Multi 3-4-5-R32

SUGGERITO  
R32



## SILENT

### Condensate water pump without neutralization system

Usable for air-conditioner and evaporator coils and cold show windows.

Usable for gaz boilers up to 400 kW.

Made from ABS plastic and is resistant to acidic condensate (PH3).

Extremely quiet.

Code	Model	Dimensions	Weight
02042002	SILENT	185 x 85 x 100 mm	1,6 kg



### Technical features

For gaz boilers up to	400 kW
Maximum flow rate	350 l/h
Max delivery height	4 m
Tank capacity	0,5 l
Fluid temperature	70°C
Voltage	230V - 50/60Hz
Alarm contact	Máx 24V. 6VA(NA) Ohm load



## CLIMA-CAP

### Protective covers for external units

Optimized dimensions for the main R32 units.

Code	Model	Dimensions	Suitable for
16010010	CLIMA-CAP-M/D	550 x 860 x 340 mm	Mono 20-35 / Multi 2-R32
16010011	CLIMA-CAP-MUL	735 x 980 x 400 mm	Mono 42-60 / Multi 3-4-5-R32

