

CERCAFUGHE SPRAY



GAS-CONTROL

Cercafughe spray

Appositamente studiato per verificare l'ermeticità di impianti funzionanti con qualsiasi tipo di gas e con formula anticorrosiva su rame, ottone e acciaio. Conforme alla norma DIN EN 14291.

Eventuali fughe sono rilevate dalla formazione di bolle o schiuma.

Codice	Modello	Capacità	Q.tà Min.	Dimensioni	Peso
09001080	GAS CONTROL	400 ml	10	340 x 140 x 200 mm	4,8 kg



32850 SURE CHECK

Cercafughe spray "Sure Check"

- Gas rilevati: propano, metano, iso-butano, gas naturale, acetone, esano, acetilene,
- Formula per tutte temperature: da -48°C a 93°C (da -55°F a 200°F)
- Ultra sensibile; bolle di lunga durata
- Bolle fluorescenti per una migliore visibilità
- Non corrosivo, non tossico
- Utilizzabile con refrigeranti, gas naturali, propano e ossigeno

Codice	Modello	Capacità	Dimensioni	Peso
09001024	32850	473 ml	260 x 70 x 70 mm	0,6 kg

SPECCHIETTI TELESCOPICI



Rif	Codice	Modello	Descrizione	Dimensioni	Peso
A	08008052	WSR-2149	5 x 9 cm	410 x 80 x 30 mm	0,15 kg
B	08008024	WSR-2146	Ø5 da 21,5 a 45 mm	410 x 80 x 30 mm	0,15 kg

SPRAY LEAK DETECTOR



GAS-CONTROL

Spray leak detector

It is designed to test the hermetic sealing of systems using any type of gas. The liquid has a special formula against corrosion if used on copper, brass and steel. In conformity with DIN EN 14291.

It reveals any leak forming bubbles of foam.

Code	Model	Capacity	Min. Qty	Dimensions	Weight
09001080	GAS CONTROL	400 ml	10	340 x 140 x 200 mm	4,8 kg




32850 SURE CHECK

"Sure Check" leak detector

- Gases detected: propane, methane, iso-butane, natural gas, acetone, acetylene.
- Formula for all temperatures: from -48°C to 93°C (from -55°F to 200°F).
- Ultra sensitive; long-lasting bubbles.
- Fluorescent bubbles for better visibility.
- Not corrosive, non-toxic.
- Can be used with refrigerants, natural gas, propane and oxygen.

Code	Model	Capacity	Dimensions	Weight
09001024	32850	473 ml	260 x 70 x 70 mm	0,6 kg

TELESCOPIC MIRRORS

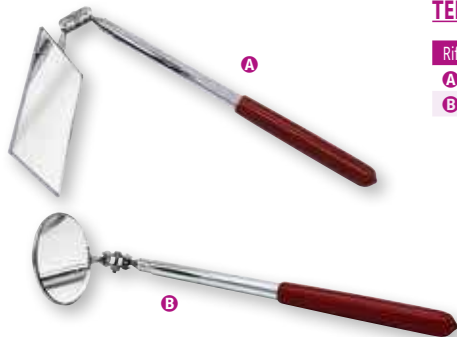

Rif	Code	Model	Description	Dimensions	Weight
A	08008052	WSR-2149	5 x 9 cm	410 x 80 x 30 mm	0,15 kg
B	08008024	WSR-2146	Ø5 da 21,5 a 45 mm	410 x 80 x 30 mm	0,15 kg