

SILENT

Pompa scarico condensa senza sistema di neutralizzazione

Utilizzabile per impianti di condizionamento e di deumidificazione dell'aria.

Utilizzabile con caldaie a gas fino a 400 kW.

Realizzata in resistente materiale plastico ABS.

Possibilità di utilizzo con caldaie a condensazione, previa installazione di sistema di trattamento/neutralizzazione della condensa.


Estremamente silenziosa.

Codice	Modello	Dimensioni	Peso
02042002	SILENT	185 x 85 x 100 mm	1,6 kg



Caratteristiche tecniche

Per caldaie a gas fino a	400 kW
Portata massima	350 l/h
Prevalenza massima	4 m
Capacità serbatoio	0,5 l
Temperatura fluido	70°C
Tensione	230V - 50/60Hz
Contatti allarme	Máx 24V. 6VA(NA) Ohm load

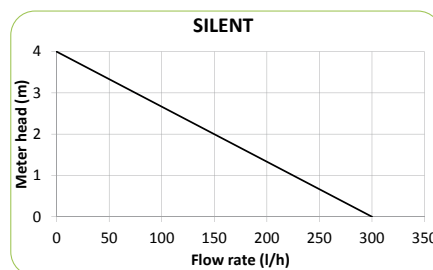

CLIMA-CAP

Teli protettivi per unità esterne

Dimensioni ottimizzate per le principali unità R32.

Codice	Modello	Misure	Adatto per
16010010	CLIMA-CAP-M/D	550 x 860 x 340 mm	Mono 20-35 / Multi 2-R32
16010011	CLIMA-CAP-MUL	735 x 980 x 400 mm	Mono 42-60 / Multi 3-4-5-R32



SILENT

Condensate water pump without neutralization system

Usable for air-conditioning air dehumidification systems.

Usabel for gas boilers up to 400kW.

Made of resistant ABS plastic material.

Can be used with condensing boilers, after installation of a condensate treatment/neutralisation system.

Extremely quiet.




Code	Model	Dimensions	Weight
02042002	SILENT	185 x 85 x 100 mm	1,6 kg



Technical features

For gas boilers up to	400 kW
Maximum flow rate	350 l/h
Max delivery height	4 m
Tank capacity	0,5 l
Fluid temperature	70°C
Voltage	230V - 50/60Hz
Alarm contact	Máx 24V. 6VA(NA) Ohm load



CLIMA-CAP

Protective covers for external units

Optimized dimensions for the main R32 units.



Code	Model	Dimensions	Suitable for
16010010	CLIMA-CAP-M/D	550 x 860 x 340 mm	Mono 20-35 / Multi 2-R32
16010011	CLIMA-CAP-MUL	735 x 980 x 400 mm	Mono 42-60 / Multi 3-4-5-R32

