

KIT RICERCA PERDITE CON AZOIDRO

Permette di rilevare e localizzare le perdite dell'impianto A/C nel rispetto del Regolamento (CE) n.1516/2007 e la direttiva 2006/40/CE. Il riduttore professionale per eccellenza **AZ200/50 con duplice connessione** integrata per cartucce e bombole (non richiede alcun adattatore esterno), la valvola di sicurezza "High Performance" e il manometro di controllo in classe 1 permettono di pressurizzare l'impianto al valore necessario con la miscela AZOIDRO per poterlo poi controllare tramite lo specifico cercafughe. Pressurizzare a 5bar.

TOTAL-TEST-A/C


DUPLICE CONNESSIONE INTEGRATA

7-8 TEST A 5 BAR

Nuovo quadrante con N2-H2

Il kit ricerca perdite TOTAL-TEST-A/C contiene all'interno di una robusta valigetta in plastica:

- Riduttore di pressione AZ200/50 con duplice connessione. Pressione max. uscita 48bar.
- Cercafughe elettronico VOYAGER.
- Manometro di controllo Ø80, classe 1 con indice di posizionamento e vite di regolazione.
- Tubo flessibile 1/4" SAE, 1500 mm + 200 mm.
- Cartuccia AZOIDRO 1 lt - 110 bar, valido per 7-8 test di verifica (test a 5 bar).
- Attacchi rapidi di bassa pressione per R134a e R1234yf.

Codice	Modello	Descrizione
13005072001	TOTAL-TEST-A/C	Attacchi paese IT W2.17 x 1/14" M un11144-5 m10x1
13005072002	TOTAL-TEST-A/C-D	Attacchi paese F-B-P-E Ø21.7 x 1.814F NF E 29-650/C M10x1
13005072003	TOTAL-TEST-A/C-C	Attacchi paese D W24.32 x 1/14" F DIN477 nr10 M10x1
13005072004	TOTAL-TEST-A/C-E	Attacchi paese GB G5/8" M BS341 nr3
RIDUTTORE DI PRESSIONE SERIE AZ200		
10002017	AZ200-50	Attacchi bombole W 21.7 x 1/14" M
10002019	AZ200-50/D	Attacchi bombole Ø21.7 x 1.814F
10002018	AZ200-50/E	Attacchi bombole G 5/8" M
10002020	AZ200-50/C	Attacchi bombole W 24.32 x 1/14" F


TOTAL-PGR-PLUS-A/C


7-8 TEST A 5 BAR

Il kit ricerca perdite TOTAL-PGR-PLUS-A/C contiene all'interno di una robusta valigetta in plastica:

- Riduttore di pressione PGR-PLUS con manometro test integrato e connessione unica per cartucce da 1lt. Pressione max uscita 10bar.
- Cercafughe elettronico VOYAGER.
- Tubo flessibile 1/4" SAE, 1500 mm + 200 mm.
- Cartuccia AZOIDRO 1 lt - 110 bar, valido per 7-8 test di verifica (test a 5bar).
- Attacchi rapidi di bassa pressione per R134a e R1234yf.

Codice	Modello	Descrizione
13005075002	TOTAL-PGR-PLUS-A/C	Kit ricerca perdite

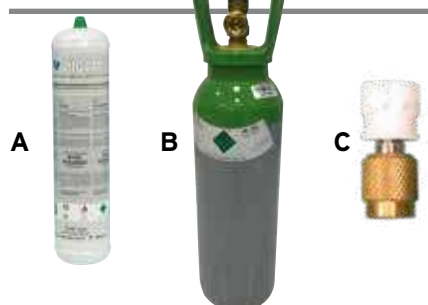BOMBOLE E CARTUCCE AZOIDRO


Cartucce e bombole contenenti AZOIDRO (miscela composta da 95% azoto e 5% idrogeno) che consentono la pressurizzazione dell'impianto e la verifica dei punti di perdita tramite il cercafughe elettronico VOYAGER.

Codice	Modello	Descrizione
A 11001112	AZOIDRO	Bomboletta 1 l - 110 bar
B 11003020	AZOIDRO/5	Bombola 5 l - 200 bar
C 09050099	RL-134/H2N2	Perdita di riferimento per R134/N2-H2

LEAK DETECTION KITS WITH AZOIDRO

TOTAL TEST allows to detect and locate the leakages of the A/C system in compliance with Regulation (EC) No. 1516/2007 and Directive 2006/40/EC.

The heavy duty professional nitrogen regulator **AZ200/50 with dual integrated connection** for cartridges and cylinders (no external adapter required), "High Performance" safety valve and class 1 control pressure gauge allows to pressurize the system to the required value with the AZOIDRO mixture, to be able to check it with the specific leak detector. Pressurize at 5 bar.

TOTAL-TEST-A/C



The TOTAL TEST A/C kit leak detection kit contains in a sturdy plastic case:

- AZ200/50 nitrogen regulator with dual connection (Max. output pressure 48 bar).
- VOYAGER electronic leak detector.
- Control pressure gauge Ø80, class 1 with positioning index and adjustment screw.
- 1/4 "SAE HD flexible hose, 1500 mm + 200 mm.
- AZOIDRO cartridge 1 lt - 110 bar, valid for 9-10 tests.
- Low pressure quick couplers for R134a and R1234yf.

Code	Model	Description
13005072001	TOTAL-TEST-A/C	Country connection it W2.17 x 1/14" M UNI1144-5 m10x1
13005072002	TOTAL-TEST-A/C-D	Country connection F-B-P-E Ø21.7 x 1.814F NF E 29-650/C M10x1
13005072003	TOTAL-TEST-A/C-C	Country connection D W24.32 x 1/14" F DIN477 nr10 M10x1
13005072004	TOTAL-TEST-A/C-E	Country connection GB G5/8" M BS341 nr3
AZ200 SERIES PRESSURE REDUCER		
10002017	AZ200-50	Bottle connections W 21.7 x 1/14" M
10002019	AZ200-50/D	Bottle connections Ø21.7 x 1.814F
10002018	AZ200-50/E	Bottle connections G 5/8" M
10002020	AZ200-50/C	Bottle connections W 24.32 x 1/14" F

TOTAL-PGR-PLUS-A/C




The total-PGR-PLUS-A/C kit contains in a sturdy plastic case:

- PGR-PLUS pressure regulator with integrated test gauge and single connection for 1-litre cartridges (Max. output pressure 10 bar).
- VOYAGER electronic leak detector.
- 1/4 "SAE HD flexible hose, 1500 mm + 200 mm.
- AZOIDRO cartridge 1 lt - 110 bar, valid for 7-8 test (test at 5bar).
- Low pressure quick couplers for R134a and R1234yf.

Code	Model	Description
13005075002	TOTAL-PGR-PLUS-A/C	Leak detection kit

AZOIDRO CARTRIDGES AND CYLINDERS

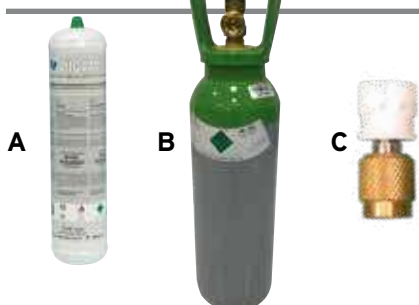

Cartridges and cylinders containing AZOIDRO (mixture composed of 95% nitrogen and 5% hydrogen) which allow the pressurization of the system and the verification of the leak points using the VOYAGER electronic leak detector.

Code	Model	Description
A 11001112	AZOIDRO	Cartridge 1 l - 110 bar
B 11003020	AZOIDRO/5	Bottle 5 l - 200 bar
C 09050099	RL-134/H2N2	Reference leak for R134/N2-H2