

RICAMBI E ACCESSORI PRESSURIZZAZIONE - TEST



WN2-60

Riduttore azoto

Riduttore con connessione per bombole di Azoto o AZOIDRO ricaricabili.

Codice	Modello	Paese	Attacchi bombole	Norma di riferimento
10002035	WN2-60	IT	W 21.7 x 1/14" M	UN 11144-5
10002037	WN2-60/D	F-B-P-E	Ø21.7 x 1.814F	NF E 29-650/C
10002036	WN2-60/E	GB	G 5/8" M	BS 341 nr.3
10002038	WN2-60/C	D	W 24.32 x 1/14" F	DIN 477 nr.10




Caratteristiche tecniche

Pressione ingresso riduttore	20 MPa
Pressione max. uscita	6,0 MPa
Attacchi	1/4" SAE
Dimensioni	220 x 180 x 110 mm
Peso	1,4 kg



Ricambi e accessori

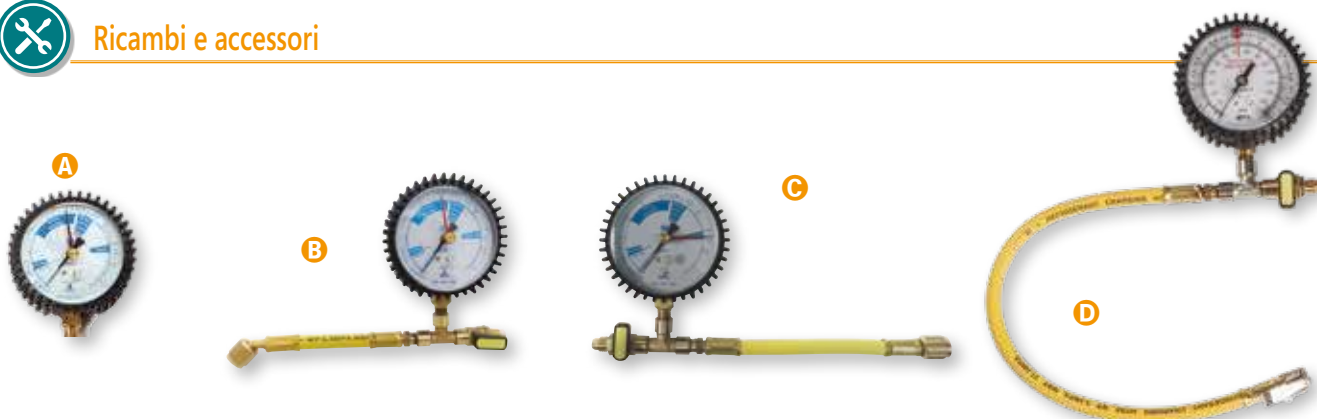

Rif	Codice	Modello	Descrizione
A	07121016	PF80/53R1/TEST	Manometro test Ø80, classe 1.0 con settori definiti, indice di posizionamento e vite di regolazione
B	05015003	V/GYSA/1M-4/6Y/PF80/N2-K1	Tubo flessibile con manometro test Ø80 classe 1.0 con connessione 1/4" SAE 45°
B	05015010	V/GYSA/1M-5/6Y/PF80/N2-K1	Tubo flessibile con manometro test Ø80 classe 1.0 con connessione 5/16" SAE 45°
C	05015016	V/GYSS/1M-4/8Y/PF80/N2-K1	Tubo flessibile con manometro test Ø80 classe 1.0 con connessione 1/4" SAE diritto
C	05015017	V/GYSA/1M-5/8Y/PF80/N2-K1	Tubo flessibile con manometro test Ø80 classe 1.0 con connessione 5/16" SAE diritto
D	05015011	V/GYSS/4M-VE/Y/PF80/10/K1	Terminale per controllo vasi espansione caldaie
	05059023001	RG180/5-4-WIG	Adattatore 5/16" F x 1/4" M
	06071001003	GYSS/4-4/36/Y	Tubo flessibile 900 mm per kit azoto 1 lt. - 1/4" SAE
	06071025003	GYSS/4-4/98Y	Tubo flessibile 2500 mm per kit azoto 5 lt. - 1/4" SAE
	14020084001	95514K-WIG	Kit 10 guarnizione per riduttori azoto AZ200-50 e WN2-60 (lato connessione bombole)
	14020083001	OR-AZ/K-WIG	Kit 10 o-ring per riduttore azoto AZ200-50 (lato connessione cartucce 950 cc)
	10010037		Manometro ricambio AP 0-315 bar per AZ200-50 - 1/4" G
	10010038		Manometro ricambio BP 0-100 bar per AZ200-50 - 1/4" G
	14029064	VP/B16	Valigia completa di termoformato per kit azoto e azoidro

PARTS AND ACCESSORIES - TEST SYSTEMS


**WN2-60****Nitrogen regulator**

Regulator with connection for refillable Nitrogen or AZOIDRO cylinders.

Code	Model	Country	Connections bottle	Standard reference
10002035	WN2-60	IT	W 21.7 x 1/14" M	UN 11144-5
10002037	WN2-60/D	F-B-P-E	Ø21.7 x 1.814F	NF E 29-650/C
10002036	WN2-60/E	GB	G 5/8" M	BS 341 nr.3
10002038	WN2-60/C	D	W 24.32 x 1/14" F	DIN 477 nr.10

**Technical features**

Regulator inlet pressure	20 MPa
Max output pressure	6,0 MPa
Connections	1/4" SAE
Dimensions	220 x 180 x 110 mm
Weight	1,7 kg

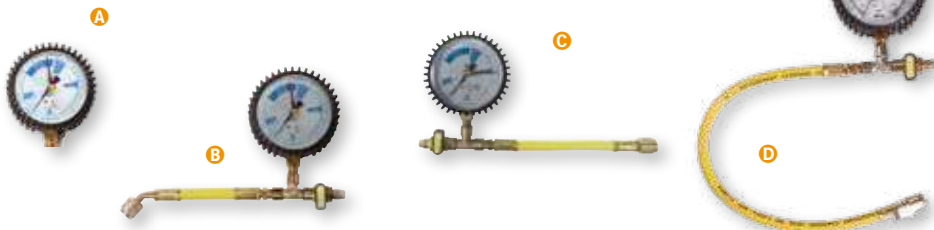**Spare parts and accessories**

Ref	Code	Model	Description
A	07121016	PF80/53R1/TEST	ø 80 test gauge, class 1,0 with defined sectors, positioning indicator and calibration screw
B	05015003	V/GYSA/1M-4/6Y/PF80/N2-K1	Flexible hose 1/4" SAE with ø80 test gauge, class 1.0 with connection 1/4" SAE 45°
B	05015010	V/GYSA/1M-5/6Y/PF80/N2-K1	Flexible hose 1/4" SAE with ø80 test gauge, class 1.0 with connection 5/16" SAE 45°
C	05015016	V/GYSS/1M-4/8Y/PF80/N2-K1	Flexible hose 1/4" SAE with ø80 test gauge, class 1.0 with connection 1/4" SAE straight
C	05015017	V/GYSA/1M-5/8Y/PF80/N2-K1	Flexible hose 1/4" SAE with ø80 test gauge, class 1.0 with connection 5/16" SAE straight
D	05015011	V/GYSS/4M-VE/Y/PF80/10/K1	Terminal for checking expansion vessel of boilers
	05059023001	RG180/5-4-WIG	Adapter 5/16" F x 1/4" M
	06071001003	GYSS/4-4/36/Y	Flexible hose 900 mm for nitrogen kit 1 lt. - 1/4" SAE
	06071025003	GYSS/4-4/98Y	Flexible hose 2500 mm for nitrogen kit 5 l. - 1/4" SAE
	14020084001	95514K-WIG	Kit 10 gaskets for nitrogen regulator AZ200-50 and WN2-60 (cylinders connection side)
	14020083001	OR-AZ/K-WIG	Kit 10 o-ring for nitrogen regulator for AZ200-50 (cartridge connection side 950 cc)
	10010037		Replacement HP gauge-315 bar for AZ200-50 - 1/4" G
	10010038		Replacement LP gauge-100 bar for AZ200-50 - 1/4" G
	14029064	VP/B16	Plastic carrying case for 1 liter nitrogen/azoidro kits